Technical Specifications

HP E22 G5 FHD Monitor




Front

I. Power Button

2. LED Power

Technical Specifications

HP E22 G5 FHD Monitor

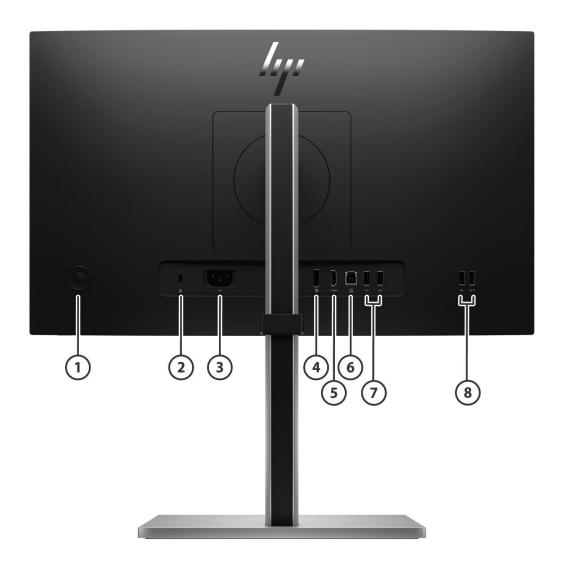

- 1. Joypad OSD button
- 2. Security Cable Slot
- 3. Power Connector
- 4. DisplayPort[™] 1.2

Back

- 5. HDMI 1.4 Port
- 6. USB-B Port
- **7.** SuperSpeed USB Type-A 5Gbps signaling rate (2)
- 8. SuperSpeed USB Type-A 5Gbps signaling rate (2) 1 charging

Technical Specifications

Model: 6N4E8AA

Panel SpecificationsDisplay Size (Diagonal)21.5 inch (54.6 cm)

Viewable Diagonal Size 21.5 inch (54.621 cm)

Panel Technology IPS
Max Refresh Rate 75Hz

Native ResolutionFHD (1920 x 1080)Panel Bit Depth8 bit (6 bit + FRC)

Aspect Ratio 16:9
Brightness (Typical) 250 nits
Contrast Ratio (Static) 1000:1
Dynamic Contrast Ratio 8M:1
Flicker Free Yes

Pixel Pitch 0.25 x 0.25 mm

Pixels Per Inch (PPI) 102 PPI

Display Colors Up to 16.7 million colors supported*

*Number of colors through A-FRC technology.

Backlight Lamp Life Minimum (To Half

Brightness - In Hours)

Backlight Type Edge-lit
Screen Treatment Anti-glare

Hardness 3H **Haze** 25%

Response Time (Typical) 5ms GtG (with overdrive)

Horizontal Viewing Angle
(Typical Cr>10)

Vertical Viewing Angle (Typical Cr>10)

178°

Panel Active Area Metric (W X H) 47.61 x 26.78 cm Panel Active Area Imperial (W X H) 18.74 x 10.54 in

NOTE: Performance specifications represent the typical specifications provided by HP's component

manufacturers; actual performance may vary either higher or lower.

Color sRGB 99%

Color Management Color Space/ Subsampling Support RGB 4:4:4, YCBCR 4:4:4, YCBCR 4:2:2

RGB Channel Adjust Yes, Gain

Default Color Temperature Neutral (6500K)

Factory Color Calibrated Yes (Color Temperature)

Factory Color Presets Warm - 5000K, Neutral - 6500K,

Cool - 9300K

Monitor Specifications Bezel Type 3-sided borderless

Color Of Stand Black & Silver

Color Of Head Black
Tilt Yes, -5~+23°

Swivel ±45°
Pivot ±90°
Height Adjust Range 150 mm

Technical Specifications

Vesa Mounting100 mm x 100 mmSecurity LockSecurity lock-ready

Detachable Stand Yes

Warranty 3/3/0 for AMS, EMEA, APJ (3/3/3 in select APJ countries)

Low Blue LightYes, HP Eye Ease (TÜV Low Blue Light Hardware Solution

certified)

Management Software HP Display Center*

HP Client Management Script Library (CMSL)**

*Host PC requires Windows 10 and above. HP Display Center is

available on the Microsoft store.

** HP CMSL is only supported on 64-bit PowerShell 5.1 and higher. CMSL Support Windows 10 version 1809 and higher, and Windows 11. Some limitations may apply to legacy displays.

Visit support.hp.com to download HP CMSL.

On Screen Display (OSD)

On Screen Display Brightness+, Color, Input, Image, Power, Menu,

Management, Information, Exit

Native Resolution FHD (1920 x 1080)

Maximum Resolution

Preset Graphic Modes/Supported

Resolutions

FHD (1920 x 1080 @ 75 Hz)

640 x 480 @ 60Hz 640 x 480 @ 75Hz

720 x 400 @ 70 Hz

800 x 600 @ 60 Hz

000 X 000 @ 00 112

800 x 600 @ 75 Hz

1024 x 768 @ 60 Hz

1024 x 768 @ 75 Hz

1280 x 720 @ 50 Hz

1280 x 720 @ 50 Hz

1280 x 800 @ 60 Hz

1280 x 1024 @ 60 Hz

1280 x 1024 @ 30 Hz

1440 x 900 @ 60 Hz

1600 x 900 @ 60 Hz

1680 x 1050 @ 60 Hz

1920 x 1080 @ 50 Hz

1920 x 1080 @ 60 Hz

1920 x 1080 @ 75 Hz

Minimum Vertical Scan Rate Maximum Vertical Scan Rate Minimum Horizontal Scan Rate Maximum Horizontal Scan Rate

User-Assignable Function Buttons

Languages

Maximum Pixel Clock180.0 MHzUser Programmable ModesYes, 18.

Yes, 4 (6 options)

11 (English, Spanish, German, French, Italian,

50 Hz

75 HZ

30.0 kHz

86.0 kHz

Netherlands, Portuguese, Japanese, T-Chinese, S-Chinese

and Russian)

Technical Specifications

Connector Types DisplayPort™ 1 DisplayPort™ 1.2

> **HDMI** 1 HDMI 1.4

HDCP Yes, DisplayPort™ and HDMI

USB-A 4 SuperSpeed USB Type-A 5Gbps signaling rate (1

charging)

USB-B (Hub enablement) 1 USB-B

Special Features SWITCH Monitor Power button

> Next Active Input/ Up button Information / Down button Brightness / Left button Color / Right button Menu / Enter button

User Presets 18 **User Updateable Firmware** Yes

Power & Operating **Power Supply** Internal

Specs Power Source 100-240VAC 50/60 Hz

> **Power Consumption- Max** 50W **Energy Saving/Stand By Mode** 0.5W **Power Consumption - Typical** 20W

Energy Star Data Operational Mode at 100 VAC 11.6W

Operational Mode at 115 VAC 11.57W Operational Mode at 230 VAC 11.64W

EU Energy Efficiency On-mode Power Consumption for 13W Class (ErP LOT-5)

ErP LOT5 Energy Efficiency Class for

Standard Dynamic Range (SDR)

Standard Dynamic Range (SDR)

Operating Conditions Operating Temperature - Celsius

> 41° - 95°F Operating Temperature - Fahrenheit Non-Operating Temperature - Celsius -40° - 65°C Non-Operating Temperature --40° - 149°F

Fahrenheit

20 – 80% Relative Humidity (non-condensing) **Operating Humidity**

5°-35°C

Non-Operating Humidity 5 - 95%

Operating Altitude 0 – 5,000 m (16,400 ft.) **Non-operating Altitude** 0 - 12,192 m (40,000 ft.)

Certifications and Low Halogen

*External power supplies, WWAN modules, power cords, cables

and peripherals excluded.

Agency Approvals and Certifications CE,CB,KC/KCC/NOM/PSB/PSE/ICE/TUV-S/ISO 9241-

> 307/cTUVus/GS/ISC/CCC/CEL/CECP/SEPA/TCO/TCO Certified Edge/Hardware Low Blue Light/Energy Star/

Korea MEPS



Compliances

Technical Specifications

	Microsoft WHQL Certification ENERGY STAR® Certified EPEAT® Registered Regions need to verify by country China Energy Label TCO Certified Edge TCO Certified	/EAC/VCCI/FCC/BSMI/BIS/NF MEPS/Australian-New Zeala EE/WEEE/TGM Win 11 (x64 only), Win 10 (x Yes EPEAT® Gold in United State *Based on US EPEAT® registrat 2018 EPEAT®. Status varies by http://www.epeat.net for mo CEL Grade 2* *Monitors produced from June regulation GB 21520-2023. Yes	end MEPS/Ukraine 64 only) es* ion according to IEEE 1680.1- country. Visit ore information.
	SmartWay Transport Partnership - NA	Yes	
	only	Yes (NA sku)	
Contains Recycled Plastics	Contains Recycled Plastics	loop plastic** * All plastic parts contain ocear ocean-bound plastic contained product. ** ITE Derived Closed Loop Plastic definition set in the IEEE 1680.	in each component varies by stic percentage is based on the 1-2018 standard.
	Recycled Metal		* s a percentage of the total weight 4021 definitions for metal parts
	Recyclable Packaging (Box, packing materials)	Outside Box and corrugated cushions are 100% sustainably sourced and recyclable* Molded Paper Pulp Cushion inside box is 100% sustainably sourced and recyclable** *100% outer box packaging and corrugated cushions made from sustainably sourced certified and recycled fibers. ** Molded pulp cushions are made from 100% recycled wood fiber and organic materials.	
		<u>Metric</u>	<u>Imperial</u>
Unit Product/Package Specifications	Product Dimensions (Unpacked with stand) (W x D x H)	48.87 x 21.1 x 49.295 cm	19.24 x 8.31 x 19.407 inch
	Product Nimensions	57 1 v 1/1 0 v 36 3 cm	22 /8 v 5 51 v 1/ 20 inch

Un Sp

Product Dimensions (Unpacked with stand) (W x D x H)	48.87 x 21.1 x 49.295 cm	19.24 x 8.31 x 19.407 inch
Product Dimensions (Packed) (W x D x H)	57.1 x 14.0 x 36.3 cm	22.48 x 5.51 x 14.29 inch
Display Head Dimensions (Unpacked without stand) (W x D x H)	48.87 x 4.60 x 29.39 cm (w/o hinge) 48.87 x 7.52 x 29.39 cm (w/ hinge)	19.24 x 1.81 x 11.57 inch (w/o hinge) 19.24 x 2.96 x 11.57 inch (w/ hinge)
Base Area Footprint (w x d mm)	242 x 187 mm	9.53 x 7.36 inch
Bezel Measurements	Bottom: 18.21 mm	Bottom: 0.72 inch



Technical Specifications

Product Weight 4.9 kg 10.8 lb

(Unpacked with stand) **Product Weight** 6.8 kg 15.0 lb

(Packed)

Product Weight 3.3 kg (w/ hinge) 7.3 lb (w/ hinge) (Head Only) 2.9 kg (w/o hinge) 6.4 lb (w/o hinge)

Pallet Information Pallet Dimensions Slip Sheet: Slip Sheet:

> (L x W x H mm) 1139 x 719 x 2187 mm 44.84 x 28.31 x 86.10 inch

> > (20' ft & 40' ft) (20' ft & 40' ft) Slip Sheet: Slip Sheet:

1139 x 719 x 2187 mm 44.84 x 28.31 x 86.10 inch

(40H0)(40H0)Pallet: Pallet:

1139 x 719 x 1955 mm 44.84 x 28.31 x 76.97 inch

(20' ft & 40' ft) (20' ft & 40' ft) Pallet: Pallet:

1139 x 719 x 2318 mm 44.84 x 28.31 x 91.26 inch

(40HQ) (40HQ)

Pallet Total Weight Slip Sheet: 411.82 kg Slip Sheet: 907.91 lb

> (20' ft & 40' ft) (20' ft & 40' ft) Slip Sheet: 411.82 kg Slip Sheet: 907.91 lb

> > (40H0)

(40H0)

(40HQ)

Pallet: 357.04 kg Pallet: 787.14 lb (20' ft & 40' ft) (20' ft & 40' ft) Pallet: 425.04 kg Pallet: 937.05 lb

(40HO)

6 layers per slip sheet **Pallet Layers**

5 layers or 6 layer per pallet 10 per layer (slip sheet) 10 per layer (pallet) 60 sets per slip sheet

Total Products per Pallet 50 sets or 60 sets per pallet

960 sets (slip sheet)

800 sets (pallet) 1920 sets (slip sheet) 1600 sets (pallet)

1920 sets (slip sheet) Container Load, 40-Foot HighQ 1920 sets (pallet)

What's in the box? AC power cord (1.83m) 5.9ft

> HDMI 1.4 cable (1.8m) 5.9 ft USB 3.0 B-A cable (1.8m) DP 1.2 cable (1.8m)

Pallet Product per Layer

Container Load, 20-Foot

Container Load, 40-Foot

Warranty

Quick Setup Poster

User Guide Languages Arabic, Bahasa Indonesia, Bulgarian, Chinese-S, Chinese-

Warranty Languages T, Czech, Danish, Dutch, English, Estonian, Finnish,

User Guide and

Technical Specifications

Warranty Languages

French, German, Greek, Hebrew, Hungarian, Italian, Japanese, Kazakh, Korean, Latvian, Lithuanian, Norwegian, Polish, Portuguese (Brazilian), Portuguese (Iberian), Romanian, Russian, Serbian, Slovak, Slovenian, Spanish, Swedish, Thai, Turkey, Ukrainian English US (EN), English AP (EN-AP), English LA (EN-LA), English UK (EN-GB), Arabic (AR) -17x, Bahasa Indonesia (ID), Bosnian (BS), Bulgarian (BG), Chinese-S (CN), Chinese-T (TW), Croatian (HR), Czech (CS), Danish (DA), Dutch (NL), Estonian (ET), Finnish (FI), French Canadian (FC), French European (FR), German (DE), Greek (EL), Hebrew (HE), Hungarian (HU), Italian (IT), Japanese (JA), Kazakh (KK), Korean (KO), Latvian (LV), Lithuanian (LT), Norwegian (NO), Polish (PL), Portuguese, Brazilian (BR), Portuguese, Iberian (PT), Romanian (RO), Russian (RU), Serbian (SR), Slovak (SK), Slovenian (SL), Spanish, Castilian (ES-ES), Spanish, Latin America (ES-MX), Swedish (SV), Thai (TH) Turkish (TR), Ukrainian (UK), Vietnamese (VI)



ENVIRONMENTAL DATA				
Eco-Label Certifications	This product has received	or is in the process of being	certified to the following approvals and may be	
& declarations	labelled with one or more of these marks:			
	 IT ECO declaration 	1		
	US ENERGY STAR®			
		/ Management Program (Fi	EMP)	
			See http://www.epeat.net for registration	
	status in your cou			
	TCO Certified Edge	-		
		servation Program (CECP)		
		onmental Protection Admir	nistration (SEPA)	
	Taiwan Green Mar		,	
	Korea Eco-label			
	Japan PC Green la	hel*		
Sustainable Impact	• 85% ITE – derived closed			
Specifications	• 25% recycled metal	toop plastic		
Specifications.	Low halogen			
		ted cushions are 100% sus	tainably sourced and recyclable	
			ainably sourced and recyclable	
	 Recycled Plastic cushions 		,,	
System Configuration	The configuration used for the Energy Consumption and Declared Noise Emissions data for the			
	Notebook model is based of			
Energy Consumption				
(in accordance with US				
ENERGY STAR® test				
method)	115VAC, 60Hz	230VAC, 50Hz	100VAC, 50Hz	
Normal Operation (Short idle)	11.57 W	11.64 W	11.6 W	
Normal Operation (Long	11.57 W	11.64 W	11.6 W	
idle)	11.57 W	11.64 W	11.0 W	
Sleep	0.26 W	0.32 W	0.26 W	
Off	0.26 W	0.32 W 0.13 W	0.26 W 0.07 W	
OII	0.07 W	U.13 W	0.07 W	
	NOTE:			
	1			
	Energy efficiency data listed is for an ENERGY STAR® compliant product if offered within the model family. HP computers marked with the ENERGY STAR® Logo are compliant with the applicable U.S.			
	Environmental Protection Agency (EPA) ENERGY STAR® specifications for computers. If a model			
	family does not offer ENERGY STAR® compliant configurations, then energy efficiency data listed is			
	for a typically configured PC featuring a hard disk drive, a high efficiency power supply, and a			
	Microsoft Windows® operating system.			
	The osore windows opera	ang system.		
Heat Dissipation*	115VAC, 60Hz	230VAC, 50Hz	100VAC, 50Hz	
Normal Operation (Short	39.6 BTU/hr	39.8 BTU/hr	39.7 BTU/hr	
idle)		55.5 2 . 5,		
Normal Operation (Long	39.6 BTU/hr	39.8 BTU/hr	39.7 BTU/hr	
idle)			33 2.3,	
Sleep	0.9 BTU/hr	1.1 BTU/hr	0.9 BTU/hr	
Off	0.2 BTU/hr	0.4 BTU/hr	0.2 BTU/hr	
	5.2.2.0,	J J. Opin	5.2 51 5/111	
	*NOTE: Heat dissination is	calculated based on the m	easured watts, assuming the service level is	
	attained for one hour.	catediated based on tile in	casa. ca watts, assammy the service tevel is	
	accamed for one flour.			

Longevity and Upgrading	This product can be upgraded, possibly extending its useful life by several years. Upgradeable features and/or components contained in the		
	Spare parts are available throughout the warranty period and or for up to "5" years after the end of production.		
Additional Information	 This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive - 2011/65/EC. This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive – 2002/96/EC. This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986). This product is in compliance with the IEEE 1680 (EPEAT) standard at the Gold level, see www.epeat.net Plastics parts weighing over 25 grams used in the product are marked per ISO11469 and ISO1043. This product is 99.2% recycle-able when properly disposed of at end of life. 		
Packaging Materials	External:	PAPER/Corrugated	997 g
		PAPER/Molded Pulp	401 g
	Internal:	PLASTIC/EPE (Expanded Polyethylene)	24 g
		PLASTIC/EPE (Expanded Polyethylene)	6 g
		PLASTIC/EPE (Expanded Polyethylene)	6 g
		packaging material contains at least 0.0% recycled con ted paper packaging materials contains at least 100%	
RoHS Compliance	HP Inc. complies fully with materials regulations. We were among the first companies to extend the restrictions in the European Union (EU) Restriction of Hazardous Substances (RoHS) Directive to our products worldwide through the HP GSE. HP has contributed to the development of related legislation in Europe, as well as China, India, and Vietnam. We believe the RoHS directive and similar laws play an important role in promoting industry-wide elimination of substances of concern. We have supported the inclusion of additional substances—including PVC, BFRs, and certain phthalates—in future RoHS legislation that pertains to electrical and electronics products. We met our voluntary objective to achieve worldwide compliance with the new EU RoHS requirements for virtually all relevant products by July 2013, and we will continue to extend the scope of the commitment to include further restricted substances as regulations continue to evolve. To obtain a copy of the HP RoHS Compliance Statement, see HP RoHS position statement.		
Material Usage	This product does not contain any of the following substances in excess of regulatory limits (refer to the HP General Specification for the Environment at http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen_specifications.html):		
	 Cert Cert Cadi Chlo Chlo Bis(i) Ben Dibt 	estos ain Azo Colorants ain Brominated Flame Retardants – may not be used a mium orinated Hydrocarbons orinated Paraffins 2-Ethylhexyl) phthalate (DEHP) zyl butyl phthalate (BBP) otyl phthalate (DBP)	s flame retardants in plastics



	Formaldehyde		
	Halogenated Diphenyl Methanes		
	Lead carbonates and sulfates		
	Lead and Lead compounds		
	Mercuric Oxide Batteries		
	 Nickel – finishes must not be used on the external surface designed to be frequently 		
	handled or carried by the user.		
	Ozone Depleting Substances		
	Polybrominated Biphenyls (PBBs)		
	Polybrominated Biphenyl Ethers (PBBEs)		
	Polybrominated Biphenyl Oxides (PBBOs)		
	Polychlorinated Biphenyl (PCB)		
	Polychlorinated Terphenyls (PCT)		
	Polyvinyl Chloride (PVC) — except for wires and cables, and certain retail packaging has been		
	voluntarily removed from most applications.		
	Radioactive Substances		
	Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)		
Packaging Usage			
rackayiiiy Usaye	HP follows these guidelines to decrease the environmental impact of product packaging:		
	Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in		
	packaging materials.		
	Eliminate the use of ozone-depleting substances (ODS) in packaging materials.		
	 Design packaging materials for ease of disassembly. 		
	 Maximize the use of post-consumer recycled content materials in packaging materials. 		
	 Use readily recyclable packaging materials such as paper and corrugated materials. 		
	 Reduce size and weight of packages to improve transportation fuel efficiency. 		
	 Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards. 		
- 1 6 116 16	LID CC . L CITC LID . L		
End-of-life Management	HP offers end-of-life HP product return and recycling programs in many geographic areas. To recycle		
and Recycling	your product, please go to: http://www.hp.com/go/reuse-recycle or contact your nearest HP sales		
	office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.		
	The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for		
each product type for use by treatment facilities. This information (product disasser			
	instructions) is posted on the Hewlett Packard web site at: http://www.hp.com/go/recyclers. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM		
	customers who integrate and re-sell HP equipment.		
HP, Inc. Corporate	For more information about HP's commitment to the environment:		
Environmental	רט וווטר וווטרוומנוטוו מטטענ חד 5 נטוווווונווופוונ נט נוופ פוועווטווווופוונ.		
Information	Global Citizenship Report		
midillation	http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html		
	Eco-label certifications		
	http://www8.hp.com/us/en/hp-information/environment/ecolabels.html		
	ISO 14001 certificates:		
	http://h20195.www2.hp.com/V2/GetDocument.aspx?docname=c04755842		
	and		
	http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/cert.pdf		
	nttp.//www.np.com/npinro/globalcitizensinp/environment/pui/tert.pui		
	l		



footnotes	Percentage of ocean-bound plastic contained in each component varies by product
	 Recycled plastic content percentage is based on the definition set in the IEEE 1680.1-2018 standard.
	 External power supplies, WWAN modules, power cords, cables and peripherals excluded.
	 100% outer box packaging and corrugated cushions made from sustainably sourced certified and recycled fibers.
	 Fiber cushions made from 100% recycled wood fiber and organic materials.
	 Plastic cushions are made from >90% recycled plastic.
	 Recycled metal is expressed as a percentage of the total weight of the metal according to ISO 14021 definitions for metal parts over 25 grams



Technical Specifications

© Copyright 2024 HP Development Company, L.P. The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

Microsoft and Windows are registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries. ENERGY STAR is a registered trademark owned by the U.S. Environmental Protection Agency.



Summary

Change Log				
April 12, 2023	V1 to V2	Updated	Color Management section	
April 29, 2024	V2 to V3	Updated	China Energy Label	
December 17, 2024	V3 to V4	Updated	HP Client Management Script Library (CMSL) Footnote	
December 20, 2024	V4 to V5	Updated	HP Client Management Script Library (CMSL) Footnote	

